



- mV Output (high level output available to 175C)
- -40-200°C Operating Temperature
- +/- .2% Linearity FS
- 150 -15k psi pressure ranges
- Gage
- Media – Harsh Liquid, Air, & Gas
- Compact Size

DESCRIPTION

The PPT86 is a pressure transducer manufactured for a high operating temperature range for the most challenging of applications. This thin film based transducer was designed for industrial, Oil/Gas, Aerospace, and commercial applications. The stainless steel design and high temperature analog component selection allows the sensor to be used in high temperature and high pressure applications.

The PPT86 series utilizes thin film sensors manufactured to Phoenix Sensors precise specifications in a single piece of 316SS housing to ensure long term stability and accuracy (.20% Linearity).

The design is simple, cost effective, and proves reliable for OEM customers. Please contact us for Custom design availability.

APPLICATIONS

- Mil/Aero
- Industrial Automation
- HVAC
- Automotive Engine
- Oil/Gas
- Hydraulic

Maximum Environmental Ratings

Operating Temperature -40°C to 125°C
 Storage Temperature Range -50°C to 130°C

Proof pressure 3x full scale pressure (or 15kPSI)
 Burst pressure 5x full scale pressure (or 15kPSI)

PPT86 Operational Characteristics

V ₊ = 5V, V ₋ = 0V, Temperature = 25°C					
PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
Excitation Voltage	V _{EX}	4.75	5.0	12	V
Excitation Current	I _{EX}		1.5	2.0	mA
Input Impedance		3	5	6	kΩ
Output Impedance		3.5	5	6	kΩ
Hysteresis			.05	.08	%FS
Zero Pressure Output (note 1)	V _{OS}			+/- 12	mV
Linearity (note 2)		-0.2		0.2	%FS
Repeatability			+/- .05		%FS
Full Scale Output (10V Input)		45	55	65	mV
Temperature Error (Span/Offset @ 35C)			.75	1	%FS
Overpressure (note 4)				20	KPSI
Operating Temperature		-40		200	C

Notes:

1) Measured with Supply Voltage at 5V. Output is ratiometric. 2) Defined as best straight line 3) Measured from 0°C to 85°C 4) 1.5X Operating Pressure (Maximum of 20KPSI)

Application Information

Package

The one piece body design is made of stainless steel (SS316L), which allows for easy manufacturability and long term stability. Automotive grade vibration proof design for engine mount. 1M output cable. Other cable lengths available at request for OEM customers.

Stability

The thin film based pressure sensor element is precision welded to a 316L SS base and sealed into the SS housing. The selection of themally capability materials reduce the mechanical stress on the sensor resulting in greater stability over time and temperature.

Additional stability is gained from factory stabilization of all sensors.

Pressure port

1/8" -18NPT, 1/4"-20 NPT, and 7/16-20UNF threads are standard SS fittings. Other port fittings such as metric sizes, and 1/4" BSP are available for OEM customers.

Media

The pressure port is tolerant to most media including but not limited to oil, air, gas, some corrosive media, and salt water.


Wetted parts

When checking media capability, the wetted surface is composed of only stainless steel (316).


Pressure ranges

Standard pressure ranges are 500, 1000, 3000, 5000, 10,000 and 15,000 psi in gauge. Custom pressure ranges are available for OEM customers.

Mechanical Dimensions (inches)

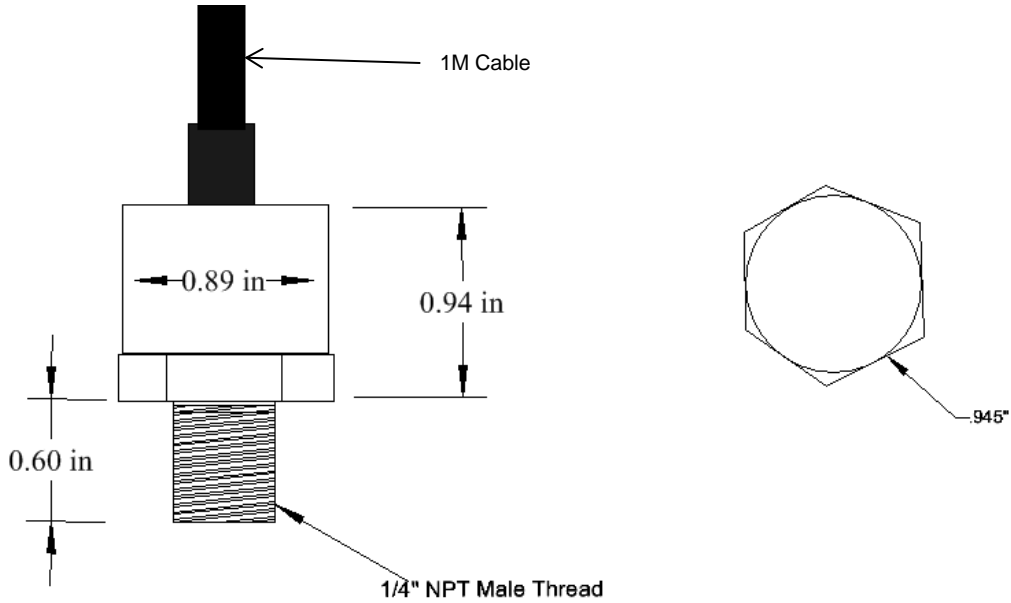

Part Number Configuration

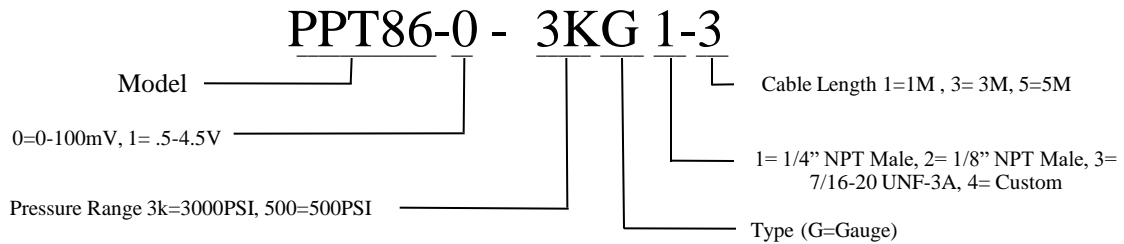

Standard Part Numbers

Model	Pressure Range PSI	Type	Max Over Pressure
PPT86-0-1KG1	1000	Gauge	3000
PPT86-0-3KG1	3000	Gauge	9000
PPT86-0-5KG1	5000	Gauge	10000

Ph: (480) 462-1810 sales@azsenco.com

Notice:

AzSensCo LLC reserves the right to make changes to the product contained in this publication. AzSensCo LLC assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. While the information in this publication has been checked, no responsibility, however, is assumed for inaccuracies.

AzSensCo LLC does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of a life-support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications.