

- Wide Pressure Range (1PSI-5kPSI)
- -20-85°C Operating Temperature
- Compact Size
- Total Error Band 1%
- BLE Wireless Communication (IOS)
- 1-5000 psi pressure ranges
- Absolute, Vacuum
- Media – Liquid, Air, & Gas
- IP65 (& IP67)
- Auto Shut-Off (Sleep Mode)

DESCRIPTION

The WEPS01 is a Bluetooth wireless pressure sensor manufactured for simple measurements on a variety of applications. This silicon pressure sensor was designed to supply an economical solution for industrial, consumer, and commercial applications.

Simply download the Phoenix Sensors application from our website and connect to the device. The sensor will wake-up with any kind of vibration and will shut down automatically when it is not in use to preserve the battery. The battery version will last up to 1 year in continuous (1 measurement/30 sec) use. Please contact us for Custom design availability.

The Mobile Software enables the user to store data to evaluate later. The sensor's on-board memory stores up to 200 hours of data for troubleshooting or evaluation of system pressure or temperature.

APPLICATIONS

- Consumer products
- Industrial Automation
- HVAC
- Pool Pumps
- Compressor
- Pneumatics

Maximum Environmental Ratings

Operating Temperature -20°C to 85°C
 Storage Temperature Range -40°C to 85°C

Proof pressure 2x full scale pressure
 Burst pressure 2.5x full scale pressure

Liquid Level – Trucks, Gas/Water Tanks

The WEPS01 is a wireless pressure sensor used in a variety of liquid level applications, such as Water Trucks, Liquid Tanks, Oil tanks, and Spas. It can measure down to 1” of H2O



HVAC – High & Low Side of A/C



The WEPS01 is a wireless pressure sensor that can measure up to pressures of 500PSI. It is accurate and robust enough for HVAC applications; if you need temporary remote Pressure and Temperature measurement of the system this sensor is your solution.

Air Compressors

The WEPS01 is a wireless pressure sensor that can measure up to pressures of 500PSI, so it is ideal for most air compressor applications. For troubleshooting, the WEPS01 offers temporary remote Pressure and Temperature measurement of the system. The battery powered solution can last up to 12-months of continuous (1 measurement/10 seconds) use.



Pumps – Water, Hydraulic, etc.



The WEPS01 is a wireless pressure sensor that can measure up to pressures of 500PSI, so it is ideal for Pump applications. For monitoring, the WEPS01 offers temporary remote Pressure measurement of the system. The battery powered solution can last up to 18-months of continuous (1 measurement/30 seconds) use.

WEPS01 Operational Characteristics

$V_+ = 5V$, $V_- = 0V$, Temperature = 25°C

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
Supply Voltage (note 1)	V_{DD}	2.2	3	5.5	V
Supply Voltage (note 5)	V_{DD}	3	12	15	V
Supply Current	I_{DD}	5	50	750	uA
Wireless Digital Output (BLE)	BLE				
Linearity (Note 2)		-0.25		0.25	%FS
Temperature Error (Null and Span) (Note 3)		-1		+1	C
Response Time	t_R		5	500	ms
Total Error Band (Note 4)		-1		1	%FS
Compensated Temperature Range	C	-10		50	C
Operating Temperature Range	C	-20		85	C

Notes:

- 1) Battery & Rechargeable Version - 3V battery operation 2) Defined as best straight line 3) Measured from 0°C to 50°C 4) Measured over compensated temperature range -10-50C
5) Option 1- Includes 3Ft Cable and no battery

Application Information

Package

The two piece body design is made of SS316 (or Brass), which allows for easy low-cost manufacturability and corrosion resistance. Vibration proof design for use in industrial applications. Plastic option is available for custom designs

Stability

The silicon MEMS pressure sensor element is mounted to a ceramic base and sealed into the SS316 (or Brass) housing. The selection of thermally capability materials reduce the mechanical stress on the sensor resulting in greater stability over time and temperature.

Additional stability is gained from factory stabilization of all sensors.

Pressure port

1/4" -18NPT and 1/8"-18NPT threads are standard SS fittings. Other port fittings such as 7/16-20UNF, and 1/4" BSP are available for OEM customers.

Media


The pressure port is tolerant to most media including but not limited to oil, air, gas, and non-corrosive media. Sensor will only work on a temporary basis in any non-air application. Sensor will need to have a period of time to dehydrate.

Wetted parts

When checking media capability, the wetted surface is composed of Aluminum and Silicon Gel.


Pressure ranges

Standard pressure ranges are 15, 30, 50, 100, 150, and 450 psi in absolute and gage. Custom pressure ranges are available for OEM customers.

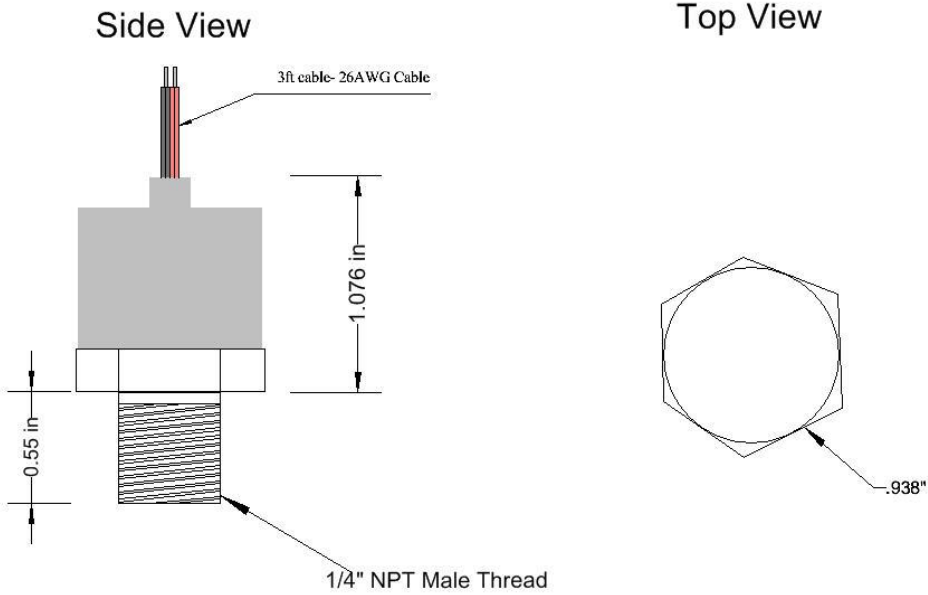

Pic. 2 - 12V Option

Part Number Configuration

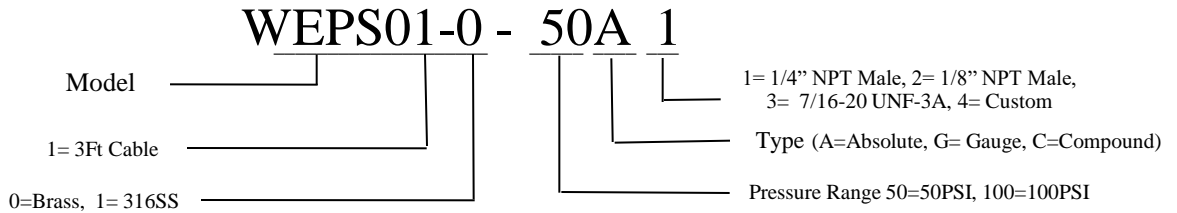

Standard Part Numbers

Model	Pressure Range PSI	Type	Max Over Pressure
WEPS01-0-50A1	50	Absolute	150
WEPS01-0-100A1	100	Absolute	200
WEPS01-0-300A1	300	Absolute	450

Ph: (480) 462-1810 sales@PhoenixSensors.com

Notice:

Phoenix Sensors LLC reserves the right to make changes to the product contained in this publication. Phoenix Sensors LLC assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. While the information in this publication has been checked, no responsibility, however, is assumed for inaccuracies.

Phoenix Sensors LLC does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of a life-support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications.