



- Liquid Level Measurements
- IP68
- +/- .5% Linearity FS
- 4-20mA
- Measure up to 690ft deep
- .3%FS Stability over 12 months
- Custom Water Depth Calibration

**DESCRIPTION**

The PLT10 is a submersible liquid level transducer. The stainless steel housing and piezo-resistive pressure sensor design allows for highly reliable design and great stability over time.

The PLT10 has a response time of ~3ms for fast response applications. Please contact us for Custom design availability.

**APPLICATIONS**

- Waste Water
- Hydrology
- Gasoline/Diesel
- Medical Applications
- City Water

**Measuring Ranges**

Order Code	15	20	25	30	35	60	150	300	600
Units	Ft-H2O								
Water Depth	15	20	25	30	35	60	150	300	600

Note: 1. Standard Factory calibration is for Water depth measurement. Contact factory for custom calibrations.

## PLT10 Operational Characteristics

V <sub>+</sub> = 10V, V <sub>-</sub> = 0V, Temperature = 25°C					
PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
Excitation Voltage	V <sub>EX</sub>	8		28	V
Output	mA	4		20	mA
Linearity (Note 2)			.25	0.5	%FS
Repeatability		-0.05		.05	%FS
Temperature Compensation			-0 – 50		C
Operation Temperature			-10 – 80		C
Full Scale Thermal Error			.05	.07	%FS/C
Response Time	t <sub>R</sub>		10	150	ms
Long Term Stability			.2		%FS/Yr

## Application Information

### Package

The housing is made of stainless steel (SS316L), which allows for harsh media such as hydraulic oils, inks, etc. The PLT10 is rated as IP68, meaning it can handle harsh media for an extended duration.

### Stability

The robust SS design allows for long term use and stability. Users can expect +/- 0.2% accuracy drift annually.

### Water Depth

Water Depths are available in a variety of options. Measure as low as 15ft, and all the way up to 600ft, the PLT10 can meet many different requirements.

### Media

The sensor is tolerant to most media including but not limited to oil, air, gas, some corrosive media, and salt water.

### Wetted parts

The wetted surfaces are composed of stainless steel, and Polyether Polyurethane.

### Cable Length

Many different cable length options are available to the customer. This allows for flexibility when measuring at different depths of the selected media.




**City Waste Water**

## Mechanical Dimensions (inches)

Cable: .20" Diameter Polyethylene/Polyurethane Cable    Diaphragm: SS 316L


### Electrical Connections

Wire Color	Connection
Red	V+
Black	0V, Out+

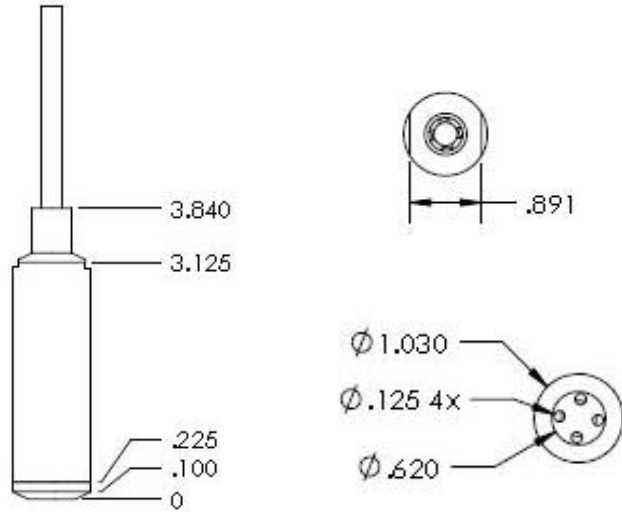

## Part Number Configuration

### PLT10-15-20 F0

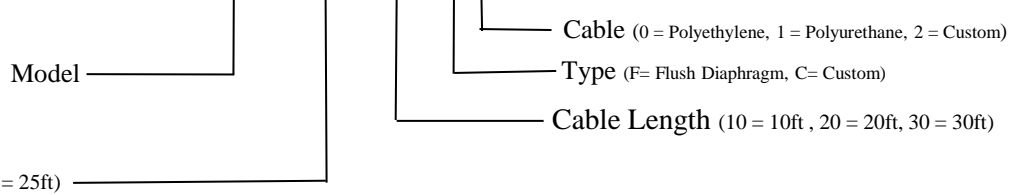

**NOTE: CUSTOM CABLE LENGTHS & CALIBRATION DEPTHS AVAILABLE FOR OEM CUSTOMERS, ADDITIONAL CHARGES MAY APPLY**

## Standard Part Numbers

Model	H2O Depth Feet	Type	Cable Length Feet
PLT10-15-20F0	15	Flush	20
PLT10-20-25F0	20	Flush	25
PLT10-25-30F0	25	Flush	30
PLT10-30-35F0	30	Flush	35
PLT10-35-40F0	35	Flush	40

Ph: (480) 462-1810    [sales@phoenixsensors.com](mailto:sales@phoenixsensors.com)

**Notice:**

Phoenix Sensors LLC reserves the right to make changes to the product contained in this publication. Phoenix Sensors LLC assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. While the information in this publication has been checked, no responsibility, however, is assumed for inaccuracies.

Phoenix Sensors LLC does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of a life-support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications.