

PPS03M High Pressure Miniature Sensing Element

10 mm media-isolated silicon piezoresistive element · 1,000 to 15,000 psi



FEATURES

- Compact Ø0.394" (10 mm) stainless steel package
- Pressure ranges from 1,000 to 15,000 psi
- Absolute or sealed gauge reference
- $\pm 0.15\%$ FS typical linearity (BFSL)
- MEMS piezoresistive die, oil-filled and media isolated
- 316L stainless steel diaphragm and housing
- Millivolt bridge output, ≥ 70 mV span
- Uncompensated or temperature-compensated versions
- -40 to 125 °C operating temperature

DESCRIPTION

The PPS03M is a miniature, high pressure sensing element for medical, industrial, and commercial OEM applications. A silicon MEMS piezoresistive die sits in a Ø10 mm 316L stainless steel housing, sealed behind a stainless steel diaphragm and silicone oil fill. The die never contacts the process media, so the element works with liquids, air, gas, and many corrosive media.

The PPS03M is available as a bare element with solder pads, or pre-mounted in a threaded port with a ribbon cable or connector. It can be supplied uncompensated or with an on-board compensation circuit. Contact us about custom designs.

APPLICATIONS

- Medical devices
- Industrial automation
- Hydraulic systems & valves
- Agricultural equipment
- Chemical process
- Natural gas

MAXIMUM ENVIRONMENTAL RATINGS

Operating Temperature	-40 to 125 °C · -40-257 °F
Storage Temperature	-40 to 125 °C · -40-257 °F
Media	Liquid, air & gas

Proof Pressure	1.5× full scale
Burst Pressure	Consult factory
Pressure Range	1,000 to 15,000 psi

Electrical & performance specifications

Unless otherwise noted: $V_{EX} = 5.0 \text{ V}$ or $I_{EX} = 1.5 \text{ mA}$, $T = 25 \text{ }^{\circ}\text{C}$

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
Excitation voltage (constant voltage)	V_{EX}	4.75	5.0	10	V
Excitation current (constant current)	I_{EX}	—	1.5	2.0	mA
Input impedance	R_{IN}	2	5	8	k Ω
Output impedance	R_{OUT}	3.5	5	6	k Ω
Zero pressure offset ⁽¹⁾	V_{OS}	−30	—	+30	mV
Full scale span output	V_{FSO}	70	—	—	mV
Linearity ⁽²⁾	—	—	± 0.15	± 0.25	%FS
Hysteresis	—	—	± 0.05	± 0.075	%FS
Repeatability	—	—	± 0.05	± 0.075	%FS
Temperature error, span / offset ⁽³⁾	—	—	± 0.75	± 1.0	%FS
Temperature coefficient of resistance	TCR	2300	—	3300	ppm/ $^{\circ}\text{C}$
Long-term drift	—	—	—	0.2	%FS/yr
Insulation resistance @ 250 VDC	—	200	—	—	M Ω
Proof pressure	—	—	—	1.5×	FS
Compensated temperature range ⁽³⁾	—	−10	—	80	$^{\circ}\text{C}$
Operating temperature	—	−40	—	125	$^{\circ}\text{C}$
Storage temperature	—	−40	—	125	$^{\circ}\text{C}$

Notes: (1) Measured at zero pressure. (2) Best straight line (BFSL). (3) Compensated versions (compensation code 2).

Electrical connections

ELEMENT PIN	FUNCTION	CONNECTOR	FUNCTION
J4	+IN (excitation)	P1	+OUT
J8, J9	−IN (excitation)	P2	GND
J5	+OUT	P3	VDD
J10	−OUT	P4	−OUT
J3	No connection	P5, P6	No connection

WIRING NOTES

Element pins apply to the bare element (cable style P). Connector pins apply to ported assemblies with cable style C or R. Follow the pinout exactly: miswiring can damage the element.

Pin configuration

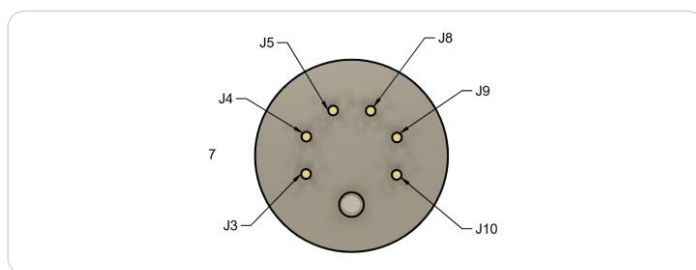


Fig. 1 – Element rear view showing pin positions J3–J10.

Package, media & installation

Package

The body is SS316L stainless steel, Ø0.394" (10 mm) across the sealing flange and 0.315" (8 mm) tall without pins. Gold-plated pins exit the rear of the element for direct soldering, or for connection to the compensation board in ported assemblies.

Pressure port

The element is available bare (no port) or pre-installed in a threaded port. Standard threads are 1/4"-18 NPT, 1/8"-27 NPT, 7/16"-20 UNF-2A, 9/16"-18 UNF, and M12x1.75-6g. Custom port fittings are available for OEM customers.

Wetted parts

316L stainless steel diaphragm and housing. The element seals radially with an NBR (Buna-N) O-ring.

Range selection

Choose a range so that the highest system pressure, including spikes and water hammer, stays below the 1.5× FS proof rating. Exceeding the proof rating shortens element life and can permanently damage the element.

Stability

The silicon MEMS piezoresistive die sits behind a stainless steel diaphragm and is sealed in silicone oil, which carries the applied pressure to the die. This all-solid, media-isolated construction gives very good long-term stability: drift is ≤0.2% FS per year.

Media

Compatible with oil, air, gas, water, and many corrosive media, including salt water. Check that your specific media is compatible with the 316L stainless steel wetted surfaces and the NBR O-ring.

Pressure ranges

Standard ranges are 1,000, 2,500, 5,000, 7,500, 10,000, and 15,000 psi, in absolute or sealed gauge. Sealed gauge versions are referenced to atmospheric pressure at the factory. Custom pressure ranges are available for OEM customers.

Handling

Never touch the diaphragm with hard or sharp objects. Seal on the O-ring only, and do not apply sealant or mechanical load to the diaphragm face.

±0.15%

Typical linearity FS

15,000

Max range psi

Ø10 mm

Element diameter

≥70 mV

Full scale span

Millivolt output & excitation

EXCITATION MODE	RECOMMENDED	MAXIMUM	OUTPUT BEHAVIOR
Constant current	1.5 mA	2.0 mA	Preferred mode; used for factory compensation
Constant voltage	5.0 V	10 V	Offset and span scale with V_{ex} (ratiometric)

Bridge output

Four piezoresistors diffused into the silicon diaphragm form the PPS03M's Wheatstone bridge. Applied pressure unbalances the bridge, producing a differential millivolt signal between +OUT and -OUT that is proportional to pressure:

$$V_{OUT} = V_{OS} + V_{FS0} \times (P / P_{FS})$$

The bridge output is low-level and differential. Read it with an instrumentation amplifier or a differential ADC input. Don't reference either output pin to ground.

Uncompensated vs. compensated

Uncompensated (code 1): the raw bridge output. Offset is up to ± 30 mV and span changes with temperature. Use this where the host system does its own calibration and temperature correction.

Compensated (code 2): an on-board compensation circuit mounted in the port corrects offset and thermal errors to $\pm 1.0\%$ FS max over -10 to 80 °C.

Compensated assembly

On compensated ported assemblies, the compensation board sits inside the port hex behind the element. The assembly connects through a 6-position connector: P1 +OUT, P2 GND, P3 VDD, P4 -OUT, P5-P6 no connection.

Wheatstone bridge

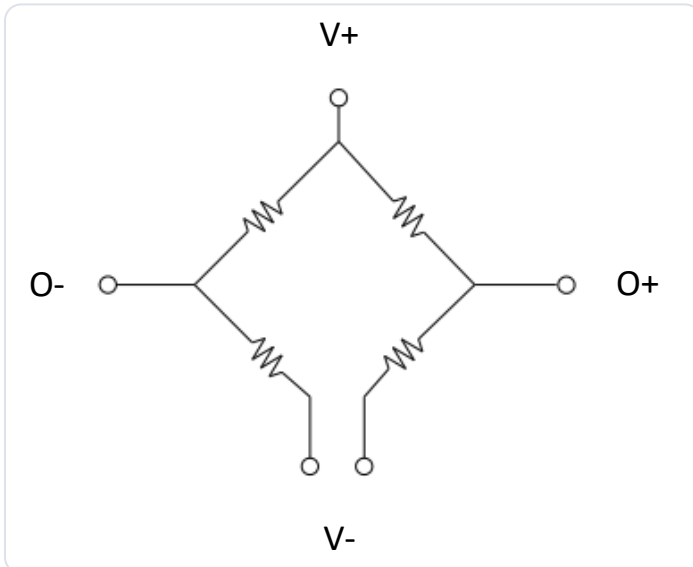


Fig. 2 – Bridge schematic with element pin assignments.

APPLICATION NOTES

Keep excitation within the maximum ratings to avoid self-heating errors.

Use shielded, twisted-pair wiring for the output signal on long runs.

Decouple excitation with $0.1 \mu F$ close to the element. J8 and J9 are both -IN; connect at least one.

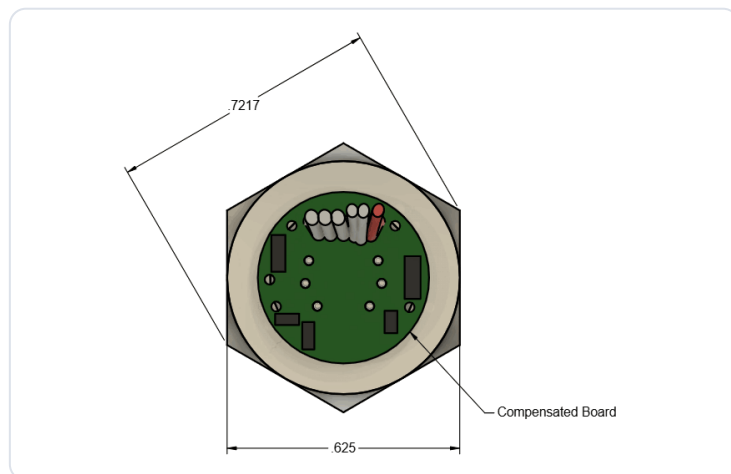


Fig. 3 – Compensation board inside the 0.625" port hex.

Mechanical dimensions – inches

Sensing element

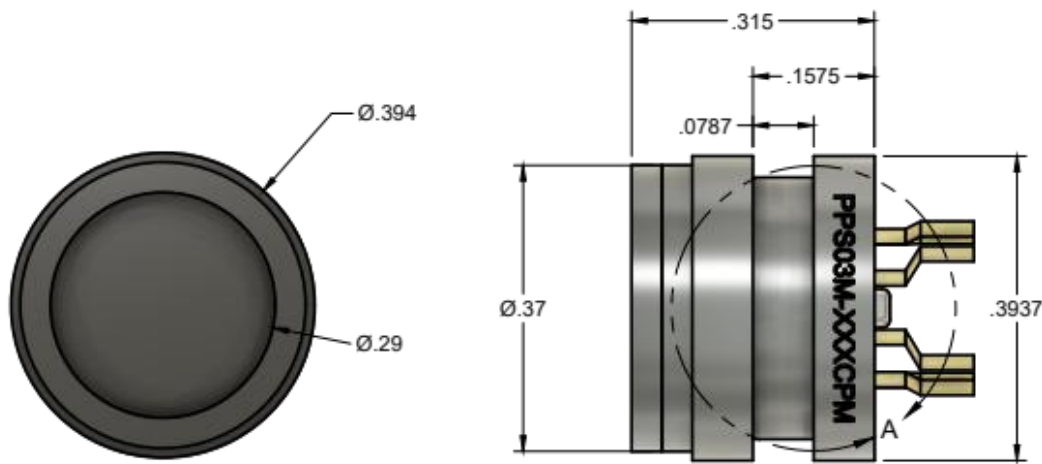


Fig. 4 – Diaphragm face (left) and side view (right). Height without pins: 0.315" (0.310–0.320).

Ported assemblies

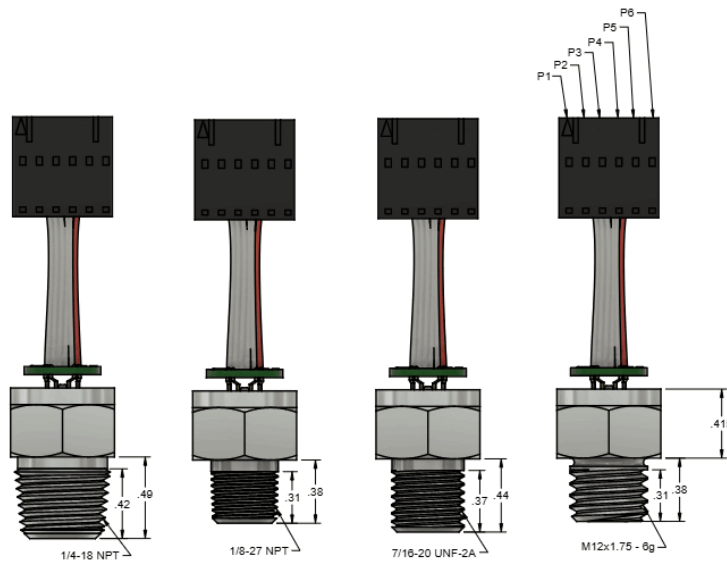


Fig. 5 – Left to right: 1/4"-18 NPT, 1/8"-27 NPT, 7/16"-20 UNF-2A, M12x1.75-6g, shown with ribbon cable and connector. 9/16"-18 UNF drawing available on request.

FEATURE	DIMENSION
Flange diameter	Ø0.394 [10.0]
Body diameter	Ø0.37 [9.4]
Diaphragm diameter	Ø0.29 [7.4]
Element height (no pins)	0.315 [8.0]
Port hex	0.625 [15.9] flats · 0.722 [18.3] corners

- NOTES
- 1) Dimensions are in inches [mm].
 - 2) Tolerances: X.XX ±0.010 · X.XXX ±0.005.
 - 3) Thread lengths, overall: 1/4 NPT 0.49 · 1/8 NPT 0.38 · 7/16 UNF 0.44 · M12 0.38.
 - 4) Material: 316L stainless steel.
 - 5) Do not apply load or sealant to the diaphragm face.

Ordering information — part-number configuration

PPS03M

—

10K

S

2

1

C

MODEL

RANGE (XXX) TYPE (Y) COMP (C) PORT (P) CABLE (M)

Model	Pressure range (XXX)	Type (Y)	Compensation (C)	Port (P)	Cable style (M)
PPS03M	1K = 1,000 psi 5K = 5,000 psi 10K = 10,000 psi 15K = 15,000 psi Custom available	A = Absolute S = Sealed gauge	1 = Uncompensated 2 = Compensated 3 = Custom	0 = No port 1 = 1/4"-18 NPT 2 = 1/8"-27 NPT 3 = 7/16"-20 UNF 4 = M12×1.75 5 = 9/16"-18 UNF	C = Cable w/ connector R = Ribbon cable P = Solder pads

SPECIFY WITH YOUR ORDER

Custom pressure range or units · Custom port fitting · Cable length and connector type · Special calibration or compensation requirements.

EXAMPLE PART NUMBERS

PPS03M-10KS21C → 10,000 psi · sealed gauge · compensated · 1/4"-18 NPT · cable w/ connector

PPS03M-5KA10P → 5,000 psi · absolute · uncompensated · no port · solder pads

Configure your PPS03M sensing element

REQUEST A QUOTE

Custom ranges, ports, compensation, and cable options are available at OEM volumes. Talk to an engineer to spec your part.

sales@phoenixsensors.com
(480) 462-1810

Notice: Phoenix Sensors LLC reserves the right to make changes to the product contained in this publication. Phoenix Sensors LLC assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. While the information in this publication has been checked, no responsibility is assumed for inaccuracies. Phoenix Sensors LLC does not recommend the use of any of its products in life-support applications where the failure or malfunction of the product can reasonably be expected to cause failure of a life-support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications.