


Type:  
PRTD1-1K-A




Version: A00  
Date: 08.07.2024

## DATASHEET PT- SENSOR

Dimension (mm)  
Proportion 5:1

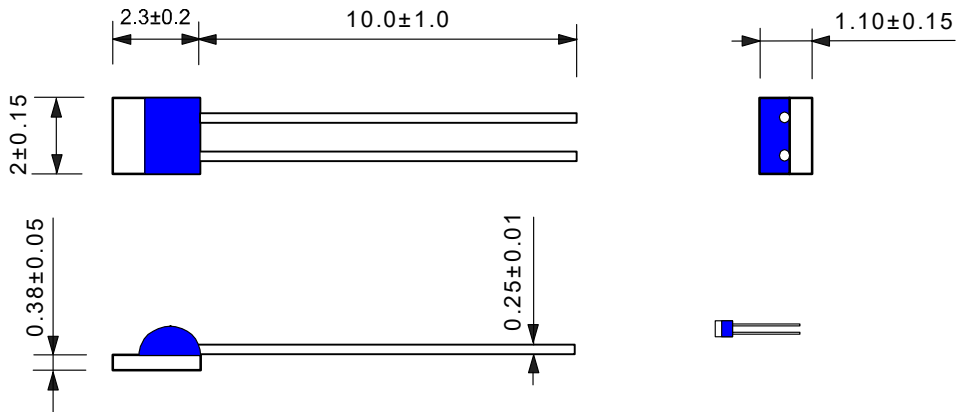

### Technical Data:

Characteristic	DIN EN 60751
Nominal Resistance at 0°C	1000.00 Ohm
Resistance Tolerance at 0°C	± 0.60 Ohm (class A (F0.15))
Temperature Coefficient of Resistance (0°C, 100°C)	3851 ppm/°C
Maximum Deviation of Nominal Characteristic	± 0.15°C + 0.002 x $\vartheta$ (°C)
Temperature Range A (F0.15)	-30°C....+300°C
Operating Temperature (note below)	-200°C....+600°C
Selfheating Coefficient (in air 1m/sec)	0.5°C/mW
Response Time $t_{0.9}$ (in water 0.4 m/sec)	0.20s
Response Time $t_{0.9}$ (in air 1m/sec)	10s
Measuring Current (recommended)	≤0.3mA
Diameter Sensor	≤ 2.45 mm
Leadwire	Ni Ø 0.25 mm
Pull Stregth 	≥ 8N

Please note: operating temperature from -200°C....+600°C possible, but with a single clear exceeding the temperature of the specified tolerance class, the specified tolerance class can no longer be guaranteed. If you exceed the recommended self-heating current you might falsify the result of measurement.

Phoenix Sensors  
375 E Elliot Rd #11  
Chandler AZ 85249  
Tel: 480-462-1810  
e-mail: sales@phoenixsensors.com

[www.phoenixsensors.com](http://www.phoenixsensors.com)



Approved (Z:  
Q00112)